



CBS 3 Framing Specifications

PRODUCTS

EZ Arch Kits

- Starting @ \$202

CBS Arch Kits

- Starting @ \$385

Solid Wood Arch Kits

- Starting @ \$572

Continuous Molding Kits

- Starting @ \$472

Ceiling Kits

- Starting @ \$750

Remodeling?

Easy Installation

New Construction?

Framing & Installation

Get a Price

Videos

Glossary / All About Arches

Framing Specs

Gallery


About Us

Contact Us

Site Map

View other Framing Specifications:

- EZ Arch Kits: [New EZ Arch](#), [445 EZ Arch](#), [470 EZ Arch](#), [RB3 EZ Arch](#)
- Custom Builder Special Arch Kits: [Model CBS 3](#), [Model CBS 4](#), [Model CBS 5](#)
- Solid Wood Arch Kits: [Model L](#), [Model B](#), [Model C](#), [Model J](#), [Model A](#), [Model R](#)
- Continuous Molding Arch Kits: [Model CM](#)

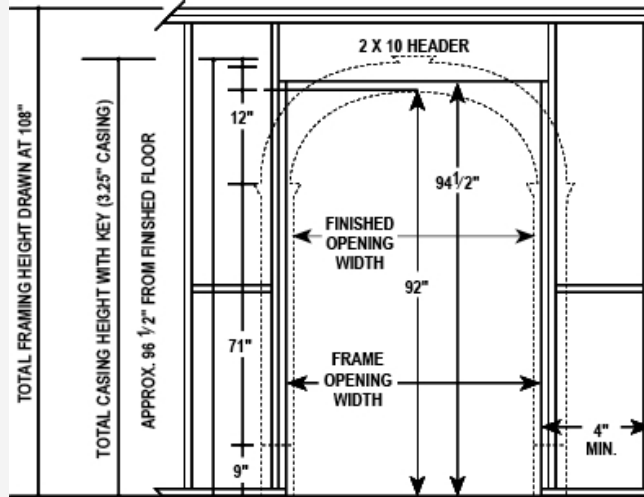

Clearance from ceiling sheetrock to top of key (3.25" casing) is approx. 10".

Capital extends 1-1/8" from back edge of molding.

Light switch boxes should be mounted minimum of 3-3/4" from rough opening.

*Subtract 12" off all vertical measurements when using 8' ceilings.

MATERIALS:

Curved Header Casing is medium-density fiberboard. Column parts are kiln dried fingerjoint poplar. Jambs are face laminated veneers.

FINISHED OPENING HEIGHTS:

Standard is 92" or 80". Standard jamb is 4-5/8".

WIDTH OF FINISHED OPENING:

Elliptical sizes: 28", 30", 32", 34", 36", 40", 42", 45", 48", 54", 57", 60", 64", 66", 72", 78", 84", 90", 96". Elliptical Rise 12".

Custom heights, opening widths and jamb widths are available.

IMPORTANT! To assure proper sheetrock installation, toenail a 2x4 across opening at 15" below header. Sheetrock both sides of opening down to this temporary 2x4. No special blocking in corners is necessary.

- Finished opening heights are standard: 92" from finished floor for 9' ceiling height and 80" for 8' ceiling height.
- Minimum distance of framed opening to corner is 4". This allows for 3/4" thick baseboard with 1/2" return.
- Frame opening width is finished opening width + 2".
- Rough opening must be within 1/4" of plumb, otherwise leave additional space.

[Print this Page: Printer-Friendly PDF](#)



